

ADVANTAGE STRIPPING COATING BLANKET

BENEFITS:

- Cord carcass for improved dimensional stability
- Optimal varnish transfer
- Clean stencil cutting either manually or CAD-assisted
- Easy stripping
- Excellent for spot coating
- Longer service life
- Reusable

NEW TECHNOLOGY


Radial cord carcass with a special layer for easy stripping

COLOUR	Pink
CONSTRUCTION	Cord carcass
TYPE	Compressible
SURFACE HARDNESS	68 +/- 3 IRHD
STRETCH	< 0.70% @ 500 N/5 cm
NOMINAL THICKNESS	1.95 mm (ISO 12636)
	1.70 mm (ISO 12636)
BOTTOM LAYER	Water/Solvent sealed
MINIMUM STENCIL DEPTH	0.90 mm (1.95 mm)
	0.80 mm (1.70 mm)
PEEL STRENGTH	25 - 40 N/50mm

MAIN APPLICATION

Sheetfed	•
Packaging	•
Coating	•
Metal decorating	•
Business forms and labels	•
Heatset	•
Coldset	•

• Recommended • Suitable • Not recommended

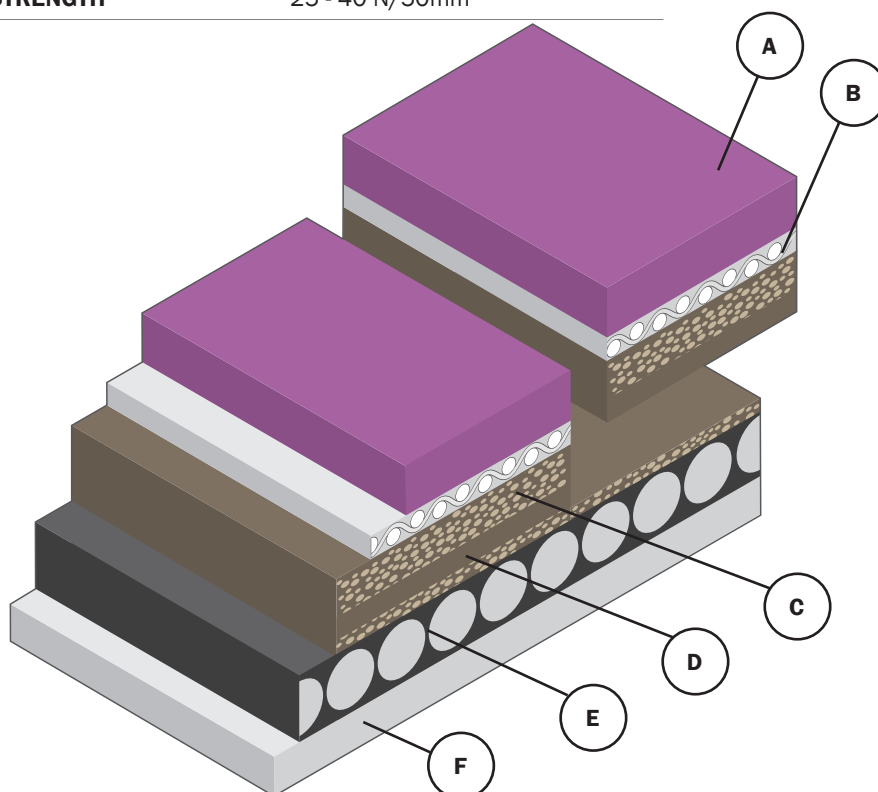

- A** - Printing surface
- B** - Fabric ply
- C** - Closed-cell compressible layer
- D** - Strippable ply
- E** - Cord ply
- F** - Sealed bottom fabric